

aune

XC1 时钟发生器
Audio Clock

使用手册 / User Manual

Preface

Dear Customers:


Thanks for purchasing the aune XC1 audio clock.

We sincerely hope the XC1 will bring you excellent Hi-Fi experience.


Please read this manual carefully before using the device.

Front Panel at a Glance

Warm-up indicators:
Red "WARM": warming up
White "RTF ON": fully warmed up

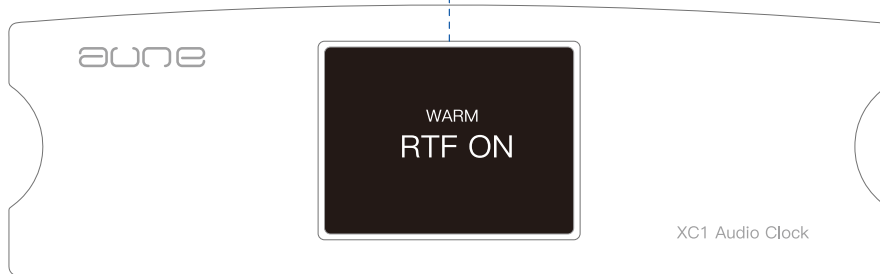

Rear Panel at a Glance

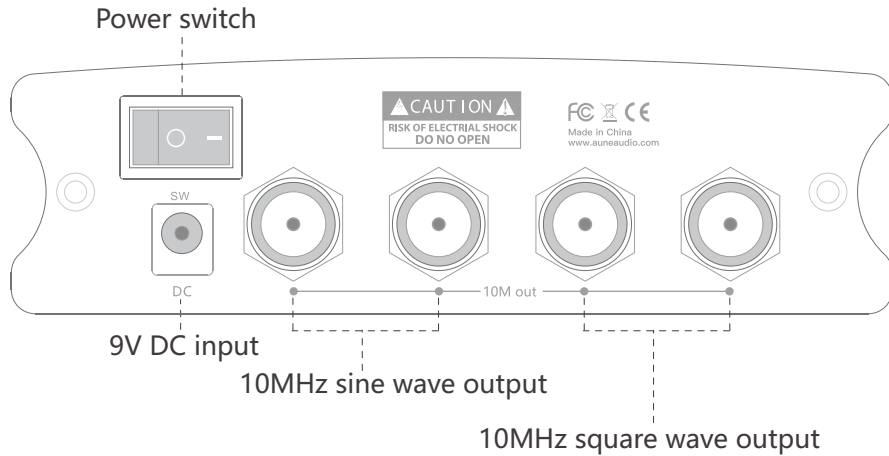

※ All 4 outputs work simultaneously

Introduction

The XC1 is a high steady state audio clock, providing high-quality reference clock signals. The two 10MHz sine wave outputs and the two 10MHz square wave outputs can work simultaneously.

Misc

Enclosure material: premium machined and anodized aluminum
DC supply: 9V 2A
Power: < 10W

* To guarantee your experience, please use the original power cord

Specifications

Output Frequency	10MHz*4
Output Frequency	10MHz >7dBm (50Ω)
Output Waveform	Square wave*2 / Sine wave*2
Frequency Accuracy (Factory)	< ±0.5ppm
Warm-Up Time	5min (Basic warm-up)
Ambient Temperature	Normal working: 0°C-50°C Recommended: 15°C-35°C
Dimensions	145 W x 171 D x 45 H (mm)
Weight	2kg



官方公众平台

OFFICIAL PUBLIC PLATFORM



aune audio



aune audio



www.auneaudio.com



aune

武汉奥莱尔科技发展有限公司

WUHAN AO LAI ER TECHNOLOGY CO.LTD.

Address: Number17, Gutian 5rd, QiaoKou district, Wuhan, 430000, China

Tel: +86-27-59251012 Web: www.auneaudio.com Email: sales@auneaudio.com

aune

aune | 430034 WUHAN | CHINA

Email: sales@auneaudio.com | Fax: +86 027 85840435 | www.auneaudio.com